




Est 1990

Pedestrian

Use the X-Protect Pedestrian barrier configuration to define pedestrian routes and protect from light duty impacts. It is also possible to combine with a pedestrian gate. The pedestrian gate is self closing, provided with a universal handle and width is adjustable from 690-1210 mm.

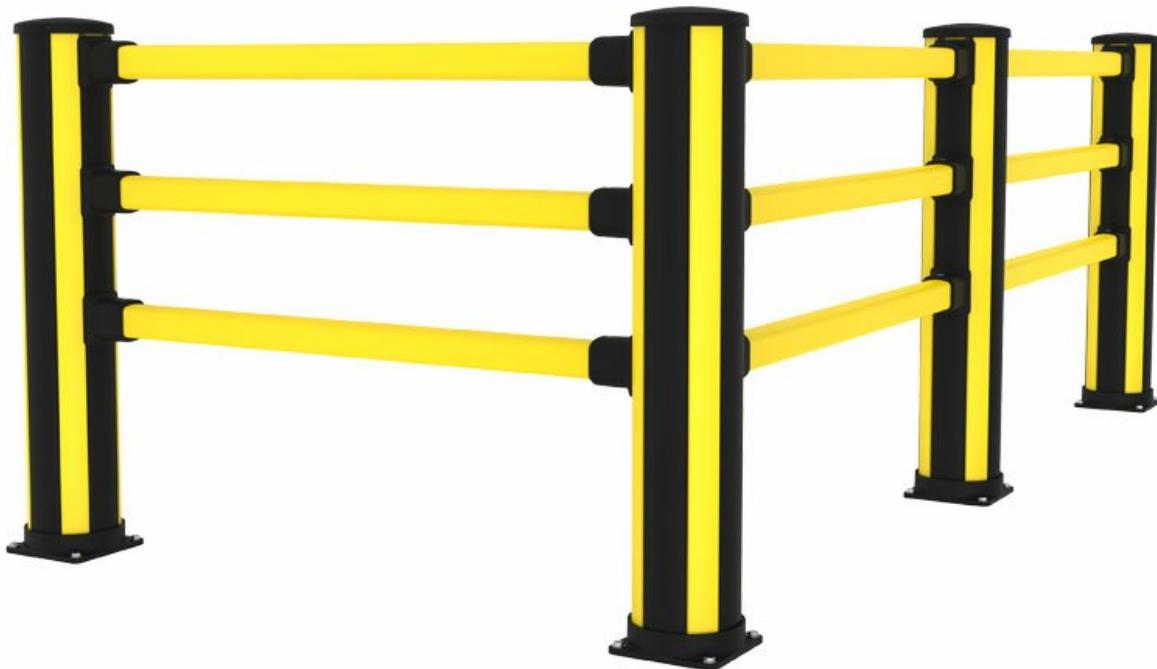

X-Protect is a unique approach to safety barriers. Unrivalled modularity, using only a few system components and damping that is built in to create a barrier system that changes with your work place. X-Protect allows rapid transformation, repair or replacement of existing barriers and bespoke configurations are limitless.

Impact test results					
Area of impact	Load	Equivalent to	90° Deflection	Force to fixings	
Centre of barrier C - C as below					
1500mm	4000 J	2500 kg 6.4 km/h	5000 kg 4.5 km/h	360mm	14.3 kN
2000mm	5000 J	2500 kg 7.2 km/h	5000 kg 5 km/h	490mm	18.7 kN
Posts					
End post	1900 J	2500 kg 4.4 km/h	5000 kg 3.1 km/h	NA *	10 kN
Mid post	1900 J	2500 kg 4.4 km/h	5000 kg 3.1 km/h	NA *	8.4 kN

* Deflection of posts is equivalent or less than that of the rail/s and is not considered to be critical for product selection. Performance is tested at height of the lowest rail. The post will perform better for lower strikes and deflection.

Models

Posts 6 articles

ARTICLES / DESCRIPTION	HEIGHT (MM)	CC (MM)	COLOR
 BCC1-116-00P3 Pedestrian corner	1160		Zinc Yellow
 BCC0-116-00P3 Pedestrian corner	1160		Zinc Yellow Graphite Black
 BCM1-116-00P3 Pedestrian mid	1160		Zinc Yellow
 BCM0-116-00P3 Pedestrian mid	1160		Zinc Yellow Graphite Black
 BCE1-116-00P3 Pedestrian end	1160		Zinc Yellow
 BCE0-116-00P3 Pedestrian end	1160		Zinc Yellow Graphite Black

Hand rails 5 articles

ARTICLES / DESCRIPTION	HEIGHT (MM)	CC (MM)	COLOR
 RCP1-177-0200 Hand rail extrusion	2000		Zinc Yellow
 RCP1-127-0150 Hand rail extrusion, C-C=1500mm, RAL 1018 yellow	1500		Zinc Yellow
 RCP1-077-0100 Hand rail	1000		Zinc Yellow
 RCP1-047-0070 Hand rail	700		Zinc Yellow
 RCP1-027-0050 Hand rail	500		Zinc Yellow

Gate 1 articles

ARTICLES / DESCRIPTION	HEIGHT (MM)	CC (MM)	COLOR
 GCP8-069-0121			

Related products




PEDESTRIAN BARRIERS

Pedestrian gate

Universally handed, self closing and width adjustable from 690mm to 1210 mm.

[1 articles](#)

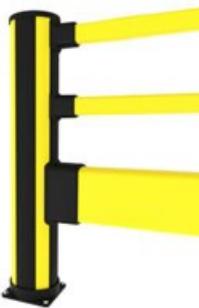

CLASSIC PEDESTRIAN BARRIER

Pedestrian with impact high

Use the X-Protect Pedestrian + Impact high barrier configuration to protect walkways from medium duty vehicles where there is a reduced risk of ground level impacts. It is also possible to combine...

[19 articles](#)



CLASSIC PEDESTRIAN BARRIER

Pedestrian with impact

Use the X-Protect Pedestrian + Impact barrier configuration to protect walkways from medium duty vehicles where there is an increased risk of ground level impacts. It is also possible to combine wi...

[19 articles](#)

X-Protect components

These are the building blocks of our modular Impact Protection range.

BARRIERS & RAILS

Hand Rails



Width x Height:

68 x 72 mm | 2 11/16" x 2 27/32"

Length:

270 - 1770 mm | 10 5/8" - 69 11/16"

Impact Barriers



Width x Height:

116 x 220 mm | 4 9/16" x 8 21/32"

Length:

270 - 2770 mm | 10 5/8" - 109 1/16"

POSTS & BOLLARDS



Classic

4 connection sides

Width:
200 mm
7 7/8"

Height:
350 -
1160 mm
13 13/16" -
45 11/16"



Essential

2 connection sides

Width:
132 mm
5 3/16"



Height:
620 -
1170 mm
24 7/16" -
46 1/16"

Height:
350 -
1160 mm
13 13/16" -
45 11/16"

X-Protect Standard Configurations

+ the highest impact energy (J) they are capable of withstanding*

* The highest force depends on the C-C. More information is available upon request.

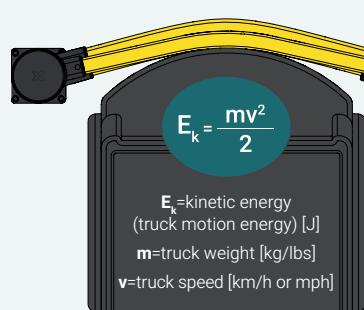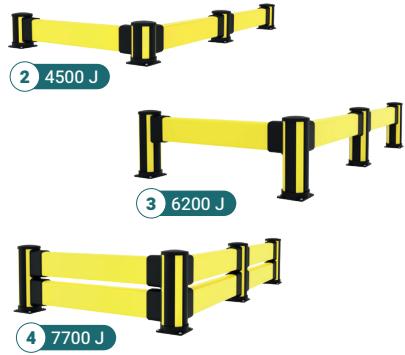

Impact testing

This is how we calculate the energy from a vehicle impact.



Speed	Load
6 km/h 3.7 mph	5020 J
8 km/h 5 mph	8880 J
12 km/h 7.5 mph	19960 J



Speed	Load
6 km/h 3.7 mph	3770 J
8 km/h 5 mph	6660 J
12 km/h 7.5 mph	14970 J




Speed	Load
6 km/h 3.7 mph	2930 J
8 km/h 5 mph	5180 J
12 km/h 7.5 mph	11670 J

Component Colours

Yellow: RAL 1018 Black: RAL 9011

Operating temperature

-10°C → 40°C

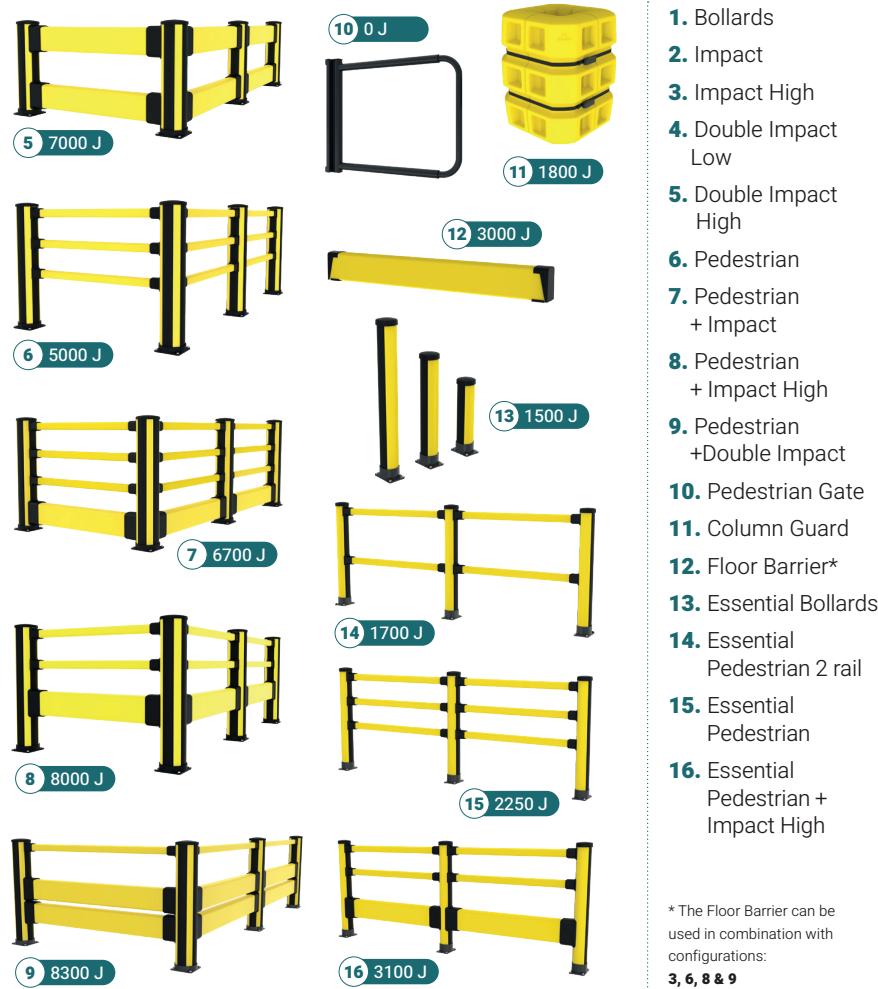

* The Floor Barrier can be used in combination with configurations:
3, 6, 8 & 9